


**Power cable**

Power cable, XLPE insulated, aluminium conductor

**NA2XY-J**

0.6/1 kV

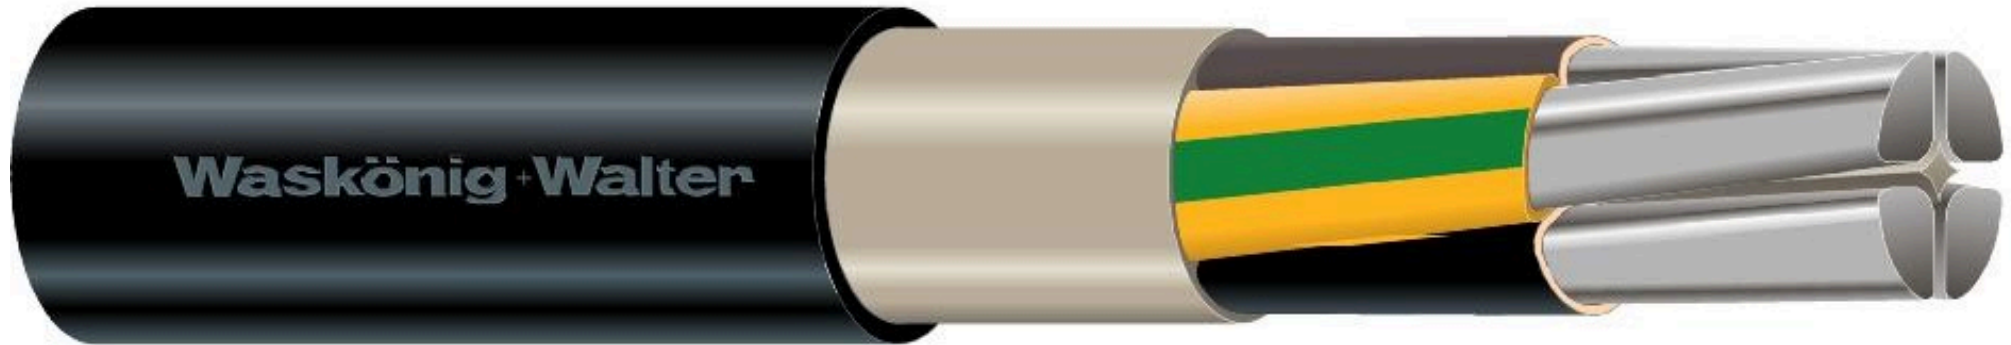

According to VDE 0276 part 603.

Characteristics	Properties	Unit
Conductor material	Aluminium	
Conductor surface	Bare	
Nominal cross section conductor	150	mm <sup>2</sup>
Conductor category	Class 1 = solid	
Shape of conductor	Sector-shaped	
Number of cores	4	Stck
Core identification	Colour	
Protective conductor	Yes	
Inner semi-conducting layer	No	
Outer semi-conducting layer	No	

Characteristics	Properties	Unit
Screen	No	
Concentric conductor	None	
Armouring	No	
Material outer sheath	Polyvinyl chloride (PVC)	
Specification material outer sheath	Other	
Colour outer sheath	Black	
Reaction-to-fire according to EN 13501-6: Class	Fca	
Halogen free (acc. EN 60754-1/2)	No	
Flame retardant	In accordance with IEC/EN 60332-1-2	
Low smoke (acc. EN 61034-2)	No	
Outer diameter approx.	42	mm
Min. permitted bending radius, stationary application/permanent installation	504	mm
Weight	2,632.7	kg/km
Max. conductor temperature	90	°C
Permitted cable outer temperature during assembling/handling	-5 <=> 70	°C
Nominal voltage U0	0.6	kV
Nominal voltage U	1	kV
max. short circuit temperature	250	°C
Insulation	XLPE (VPE)	
Minimum bending radius	12	x Außen-Ø

Packing	Individual length (in m)	Net weight (in kg)
Ring, Drum	Cut length	2,633