


Power cable

Medium-voltage cable, XLPE insulated, copper conductor, PVC outsidersheath

N2XSY (3x) 20kV

12/20 kV

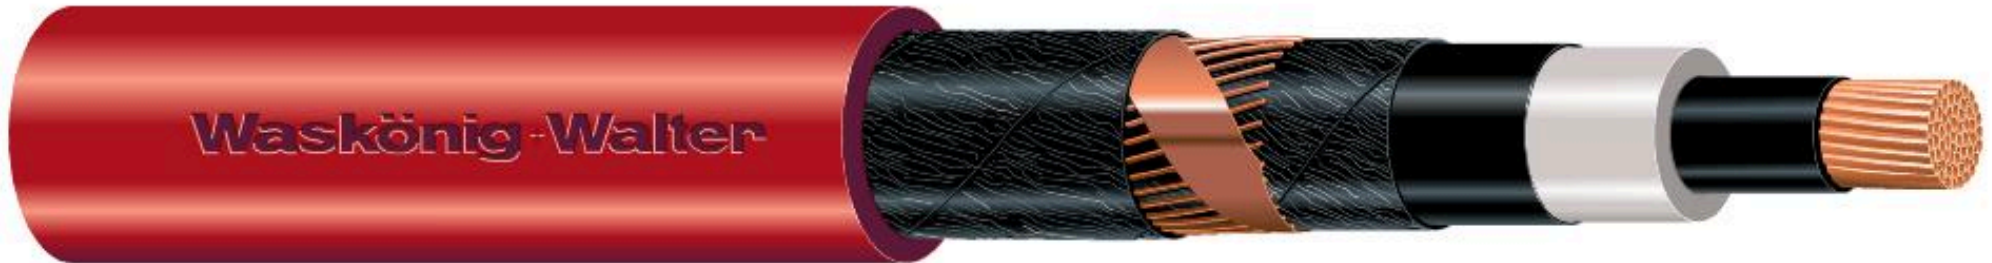

according VDE 0276 part 620.

Characteristics	Properties	Unit
Conductor material	Copper	
Conductor surface	Bare	
Conductor category	Class 2 = stranded	
Shape of conductor	Round	
Number of cores	3	Stck
Core identification	None	
Laminated sheath	No	
Fibre optic elements	No	
Inner semi-conducting layer	Yes	
Outer semi-conducting layer	Yes	
Armouring	No	

Characteristics	Properties	Unit
Material outer sheath	Polyvinyl chloride (PVC)	
Specification material outer sheath	Other	
Colour outer sheath	Red	
Conductive coating	No	
Longitudinal water blocking conductors	No	
Longitudinal water blocking screen	No	
Halogen free (acc. EN 60754-1/2)	No	
Flame retardant	In accordance with IEC/EN 60332-1-2	
Low smoke (acc. EN 61034-2)	No	
Max. conductor temperature	90	°C
Permitted cable outer temperature during assembling/handling	5 <=> 70	°C
Nominal voltage U ₀	12	kV
Nominal voltage U	20	kV
max. short circuit temperature	250	°C
Insulation	XLPE (VPE)	
Minimum bending radius	15	x Außen-Ø

Product			Packaging		
Nominal cross section conductor (in mm ²)	Outer diameter approx. (in mm)	Weight (in kg/km)	Packing	Individual length (in m)	Net weight (in kg)
50	65	3,466.5	Ring, Drum	Cut length	3,467
240	88	9,704.1	Ring, Drum	Cut length	9,704