


Power cable

ECO-FLEX 1x Eca

Power cable, XLPE insulated, flexible copper conductor, halogen free

0.6/1 kV

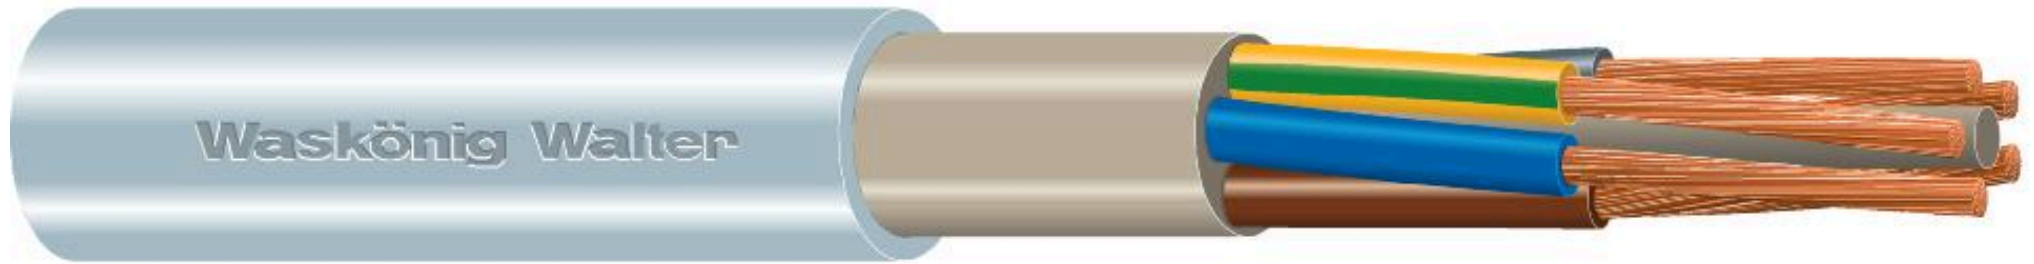

Characteristics	Properties	Unit
Conductor material	Copper	
Conductor surface	Bare	
Conductor category	Class 5 = flexible	
Shape of conductor	Round	
Number of cores	1	Stck
Core identification according to HD 308 S2	Yes	
Core identification	Colour	
Laminated sheath	No	
Fibre optic elements	No	
Protective conductor	Yes	
Inner semi-conducting layer	No	
Outer semi-conducting layer	No	
Screen	No	

Characteristics	Properties	Unit
Concentric conductor	None	
Armouring	No	
Material outer sheath	Polyolefin	
Specification material outer sheath	Polyethylene (PE)	
Colour outer sheath	Grey	
Conductive coating	No	
Longitudinal water blocking conductors	No	
Longitudinal water blocking screen	No	
Reaction-to-fire according to EN 13501-6: Class	Eca	
Halogen free (acc. EN 60754-1/2)	Yes	
Flame retardant	In accordance with IEC/EN 60332-1-2	
Low smoke (acc. EN 61034-2)	Yes	
Max. conductor temperature	90	°C
Nominal voltage U ₀	0.6	kV
Nominal voltage U	1	kV
max. short circuit temperature	250	°C
Insulation	XLPE (VPE)	
Minimum bending radius	5	x Außen-Ø

Product			Packaging		
Nominal cross section conductor (in mm ²)	Outer diameter approx. (in mm)	Weight (in kg/km)	Packing	Individual length (in m)	Net weight (in kg)
25	12	284.83	Ring, Drum	Cut length	285
50	15	527.09	Ring, Drum	Cut length	527
95	19	914.77	Ring, Drum	Cut length	915