


Power cable

NA2XS(FL)2Y 10kV

Medium-voltage cable, XLPE insulated, aluminium conductor, longitudinal and transversal water blocked screen, polyethylene outersheath

6/10 kV

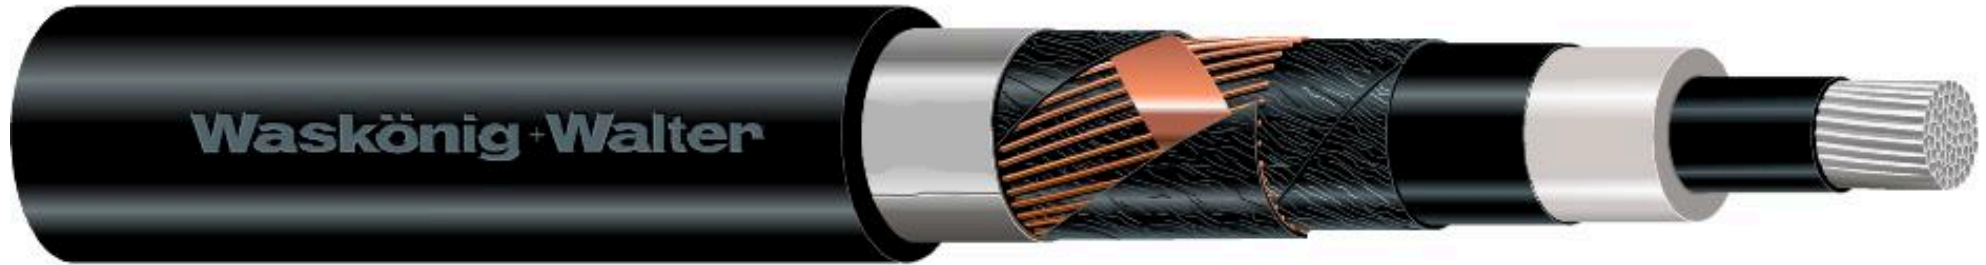

according to VDE 0276 part 620.

Characteristics	Properties	Unit
Conductor material	Aluminium	
Conductor surface	Bare	
Nominal cross section conductor	150	mm ²
Conductor category	Class 2 = stranded	
Shape of conductor	Round	
Number of cores	1	Stck
Core identification	None	
Laminated sheath	Yes	
Fibre optic elements	No	
Protective conductor	No	
Inner semi-conducting layer	Yes	
Outer semi-conducting layer	Yes	

Characteristics	Properties	Unit
Screen	Yes	
Concentric conductor	None	
Armouring	No	
Material outer sheath	Polyolefin	
Specification material outer sheath	Polyethylene (PE)	
Colour outer sheath	Black	
Conductive coating	No	
Longitudinal water blocking conductors	No	
Longitudinal water blocking screen	Yes	
Reaction-to-fire according to EN 13501-6: Class	Fca	
Halogen free (acc. EN 60754-1/2)	Yes	
Flame retardant	No	
Low smoke (acc. EN 61034-2)	No	
Outer diameter approx.	31	mm
Min. permitted bending radius, stationary application/permanent installation	465	mm
Weight	1,121	kg/km
Max. conductor temperature	90	°C
Permitted cable outer temperature during assembling/handling	-20 <=> 70	°C
Nominal voltage U0	6	kV
Nominal voltage U	10	kV
max. short circuit temperature	250	°C
Insulation	XLPE (VPE)	
Minimum bending radius	15	x Außen-Ø

Packing	Individual length (in m)	Net weight (in kg)
Ring, Drum	Cut length	1,121